



EasyGate Elite

Type

Swing technology
1 wing / 2 wings
Round front

Safety & Security Detection

30 pairs of IR sensors
Adjustable Safety & Security levels
Tailgating / Cross over detection

Dimensions

Cabinet height	38.39"	990 mm
Cabinet length	55.12"	1 400 mm
Barrier height standard	38.98"	990 mm
Barrier height max.	70.87"	1 800 mm
Passage width standard[1]	25.59"	650 mm
Passage width max.[1]	36.22"	920 mm

Special features*

Arc layout
Staggered / diagonal layout
Flag wing




EasyGate Elite / 39" 990 mm



EasyGate Elite / 70.9" 1 800 mm

* Optional [1] For 2 wings type [2] Dual opening mode [3] Cabinet length extended & Dual opening mode

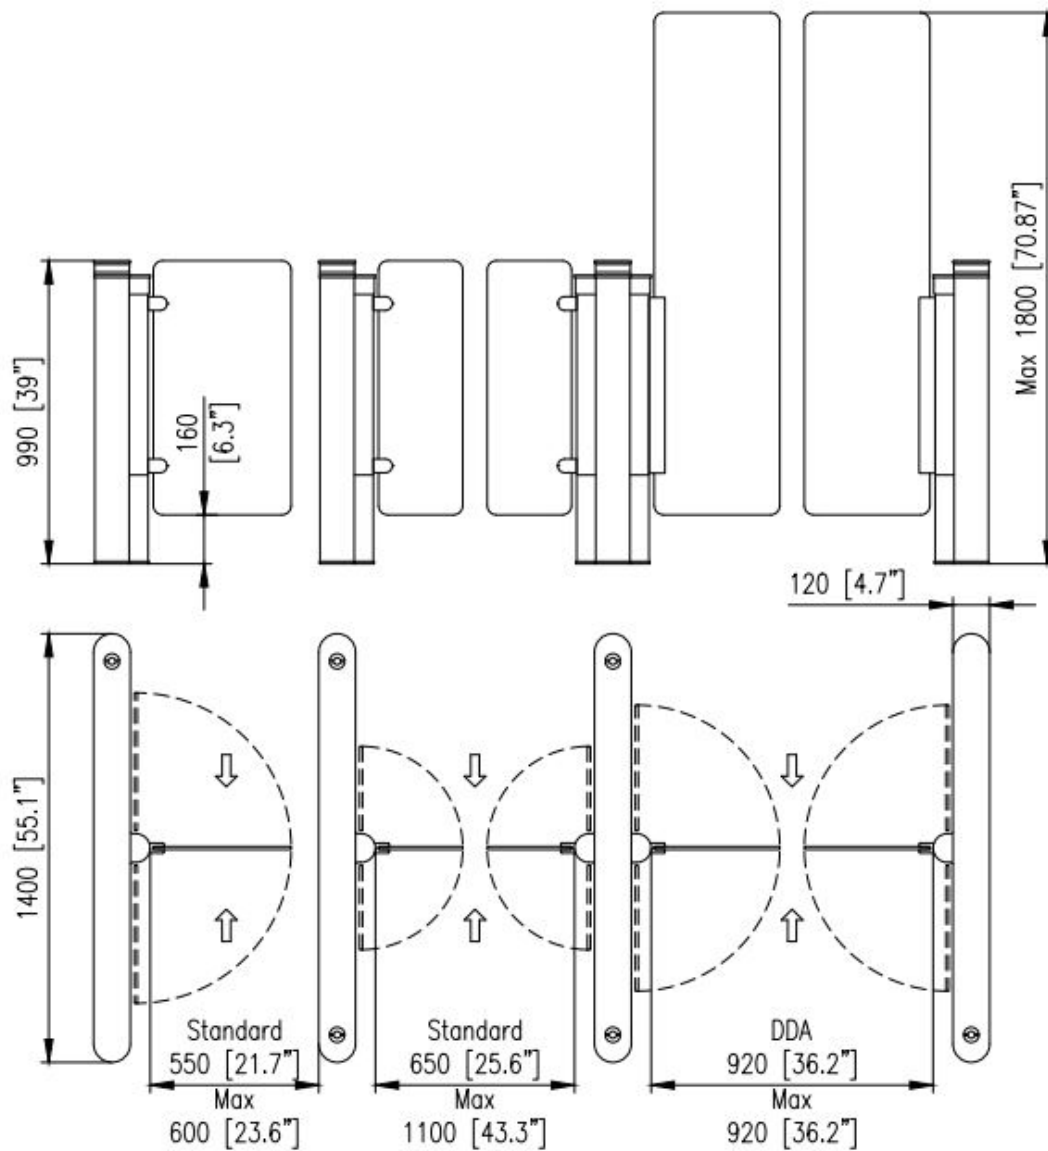

Operating Environment

Indoor

Drive Mechanism

Fail Safe

MCBF 5,000,000

Power Supply

110 AC, 60 Hz

Emergency Mode

Open automatically in the exit direction

Optional Accessories

- RFID reader bracket (flush mounted)
- Access Light / Lane Light / Edge Light / Wing Light / Passage Light WAV player
- Hinge capping
- Pressure sensing top
- RF remote control
- EasyTouch / TouchPanel / T-MON SW
- SuperCap (emergency power back-up)
- Alternative surface finishes / Optional top finishes
- Integration of LiftCall / Card collector / BarCode scanner
- Surface Mounting Bases

Material and Colours

Covers	brushed stainless steel	
Top Lid	black glass	
Barriers	tempered glass barrier panels	(0.39"/10mm)
Side infill panel	tempered glass panels	(0.24"/6mm)

